

**1 & 2 Pole - Low profile (15.7 mm height)**  
**41.31 - 1 Pole 12 A (3.5 mm pin pitch)**  
**41.52 - 2 Pole 8 A (5 mm pin pitch)**  
**41.61 - 1 Pole 16 A (5 mm pin pitch)**


**PCB mount**

- direct or via PCB socket

**35 mm rail mount**

- via screw and screwless sockets

- AC and DC coils
- 8 mm, 6 kV (1.2/50 μs) isolation, coil-contacts
- Cadmium Free contact materials
- Flux proof: RT II standard, (RT III option)



FOR UL RATINGS SEE:

"General technical information" page V

**Contact specification**

Contact configuration	1 CO (SPDT)	2 CO (DPDT)	1 CO (SPDT)
Rated current/ Maximum peak current	A 12/25	8/15	16/30
Rated voltage/ Maximum switching voltage	V AC 250/400	250/400	250/400
Rated load AC1	VA 3000	2000	4000
Rated load AC15 (230 V AC)	VA 600	400	750
Single phase motor rating (230 V AC)	kW 0.5	0.3	0.5
Breaking capacity DC1: 30/110/220 V	A 12/0.3/0.12	8/0.3/0.12	16/0.3/0.12
Minimum switching load	mW (V/mA) 300 (5/5)	300 (5/5)	300 (5/5)
Standard contact material	AgNi	AgNi	AgNi

**Coil specification**

Nominal voltage (U <sub>N</sub> )	V AC (50/60 Hz)	24 - 230	24 - 230	24 - 230
	V DC	5 - 6 - 12 - 24 - 48 - 60 - 110	5 - 6 - 12 - 24 - 48 - 60 - 110	5 - 6 - 12 - 24 - 48 - 60 - 110
Rated power AC/DC	VA (50 Hz)/W	0.75/0.4	0.75/0.4	0.75/0.4
Operating range	AC	(0.8...1.1)U <sub>N</sub>	(0.8...1.1)U <sub>N</sub>	(0.8...1.1)U <sub>N</sub>
	DC	(0.7...1.5)U <sub>N</sub>	(0.7...1.5)U <sub>N</sub>	(0.7...1.5)U <sub>N</sub>
Holding voltage	AC/DC	0.8/0.4 U <sub>N</sub>	0.8/0.4 U <sub>N</sub>	0.8/0.4 U <sub>N</sub>
Must drop-out voltage	AC/DC	0.15/0.1 U <sub>N</sub>	0.15/0.1 U <sub>N</sub>	0.15/0.1 U <sub>N</sub>


**Technical data**

Mechanical life AC/DC	cycles	10 · 10 <sup>6</sup> / 10 · 10 <sup>6</sup>	10 · 10 <sup>6</sup> / 10 · 10 <sup>6</sup>	10 · 10 <sup>6</sup> / 10 · 10 <sup>6</sup>
Electrical life at rated load AC1	cycles	60 · 10 <sup>3</sup>	60 · 10 <sup>3</sup>	50 · 10 <sup>3</sup>
Operate/release time	ms	8/6	8/6	8/6
Insulation between coil and contacts (1.2/50 μs)	kV	6 (8 mm)	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	V AC	1000	1000	1000
Ambient temperature range	°C	-40...+70 (AC); +85 (DC)	-40...+70 (AC); +85 (DC)	-40...+70 (AC); +85 (DC)
Environmental protection		RT II	RT II	RT II

**Approvals** (according to type)




- 3.5 mm contact pin pitch
- 1 Pole 12 A
- PCB direct or via socket



Copper side view




- 5 mm contact pin pitch
- 2 Pole 8 A
- PCB direct or via socket



Copper side view



- 5 mm contact pin pitch
- 1 Pole 16 A
- PCB direct or via socket



Copper side view

**1 & 2 Pole - Polarized bistable, Low profile  
(15.7 mm height)**

**41.52 - 2 Pole 8 A (5 mm pin pitch)**

**41.61 - 1 Pole 16 A (5 mm pin pitch)**

**Printed Circuit mount**

- Polarized bistable relay with 2 coils
- 10 mm, 6 kV (1.2/50  $\mu$ s) isolation, coil-contacts
- Cadmium Free contact materials
- Flux proof: RT II standard

A

**41.52.6.xxx**





- 2 Pole, 8 A
- PCB direct mount


**41.61.6.xxx**




- 1 Pole, 16 A
- PCB direct mount




2 coil version:  
A3(+) A2 (-) = Set  
A3(+) A1 (-) = Reset



Copper side view



2 coil version:  
A3(+) A2 (-) = Set  
A3(+) A1 (-) = Reset



Copper side view

**Contact specification**

Contact configuration		2 CO (DPDT)	1 CO (SPDT)
Rated current/ Maximum peak current ( $I_N/I_{max}$ )	A	8/15	16/30
Rated voltage/ Maximum switching voltage ( $U_N/U_{max}$ )	V AC	250/400	250/400
Rated load AC1	VA	2000	4000
Rated load AC15 (230 V AC)	VA	350	750
Single phase motor rating (230 V AC)	kW	0.37	0.55
Breaking capacity DC1: 30/110/220 V	A	8/0.3/0.12	16/0.3/0.12
Minimum switching load	mW (V/mA)	500 (5/100)	500 (5/100)
Standard contact material		AgSnO <sub>2</sub>	AgSnO <sub>2</sub>







**Coil specification**

Nominal voltage ( $U_N$ )	V DC	5 - 12 - 24	5 - 12 - 24
Rated power ( $P_N$ )	W	0.65	0.65
Operating range	DC	(0.7...1.1) $U_N$	(0.7...1.1) $U_N$
Min. impulse duration	ms	20	20
Max. impulse duration	s	30	30

**Technical data**

Mechanical life DC	cycles	5 · 10 <sup>6</sup>	5 · 10 <sup>6</sup>
Electrical life at rated load AC1	cycles	30 · 10 <sup>3</sup>	30 · 10 <sup>3</sup>
Operate/release time	ms	10/5	10/10
Insulation between coil and contacts (1.2/50 $\mu$ s)	kV	6 (10 mm)	6 (10 mm)
Dielectric strength between open contacts	V AC	1000	1000
Ambient temperature range	°C	-40...+85	-40...+85
Environmental protection		RT II	RT II

**Approvals** (according to type)

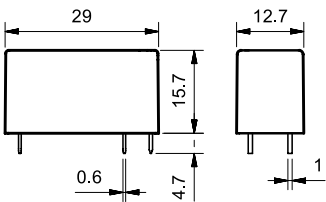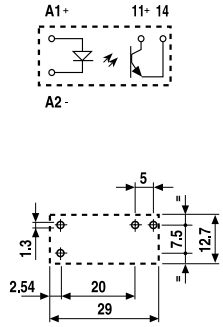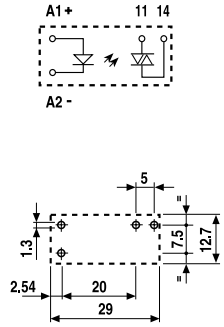
<p><b>Solid State Relays</b></p> <p><b>Printed circuit mount:</b> - direct or via PCB socket</p> <p><b>35 mm rail mount:</b> - via screw or screwless sockets)</p> <ul style="list-style-type: none"> <li>• Single circuit output switching options                     <ul style="list-style-type: none"> <li>- 5 A 24 V DC</li> <li>- 3 A 240 V AC</li> </ul> </li> <li>• Silent, high speed switching with long electrical life</li> <li>• LED indicator</li> <li>• Low profile (15.7 mm)</li> <li>• Wash tight: RT III</li> <li>• 2500 V AC insulation, input-output</li> </ul>	<p><b>41.81 - 9024</b></p> 	<p><b>41.81 - 8240</b></p> 
	<ul style="list-style-type: none"> <li>• 5 A, 24 V DC output switching</li> <li>• PCB or 93 Series sockets</li> </ul>	<ul style="list-style-type: none"> <li>• 3 A, 240 V AC output switching</li> <li>• Zero crossing switching</li> <li>• PCB or 93 Series sockets</li> </ul>
	 <p style="text-align: center;">Copper side view</p>	 <p style="text-align: center;">Copper side view</p>
<p><b>Output circuit</b></p>	1 NO (SPST-NO)	1 NO (SPST-NO)
<p>Contact configuration</p>	1 NO (SPST-NO)	1 NO (SPST-NO)
<p>Rated current/ Maximum peak current (10 ms)</p>	A 5/40	3/40
<p>Rated voltage/ Maximum blocking voltage</p>	V (24/35)DC	(240/—)AC
<p>Switching voltage range</p>	V (1.5...24)DC	(12...275)AC
<p>Repetitive peak off-state voltage</p>	$V_{pk}$ —	600
<p>Minimum switching current</p>	mA 1	50
<p>Max. "OFF-state" leakage current</p>	mA 0.01	1
<p>Max. "ON-state" voltage drop</p>	V 0.3	1.1
<p><b>Input circuit</b></p>		
<p>Nominal voltage</p>	V DC 12 24	12 24
<p>Operating range</p>	V DC 8...17 14...32	8...17 14...32
<p>Control current</p>	mA 5.5 9	8.8 9
<p>Release voltage</p>	V DC 4 9	4 9
<p>Impedance</p>	$\Omega$ 1550 2600	1030 2600
<p><b>Technical data</b></p>		
<p>Operate/release time</p>	ms 0.05/0.25	10/10
<p>Dielectric strength between input/output</p>	V AC 2500	2500
<p>Ambient temperature range</p>	$^{\circ}C$ -20...+60	-20...+60
<p>Environmental protection</p>	RT III	RT III
<p><b>Approvals</b> (according to type)</p>		

## Ordering information

### Electromechanical relay (EMR)

Example: 41 series low-profile PCB relay, 2 CO (DPDT), 24 V DC coil.

A



- Series** —————
- Type** —————  
3 = PCB - 3.5 mm pinning  
5 = PCB - 5 mm pinning  
6 = PCB - 5 mm pinning
- No. of poles** —————  
1 = 1 pole for  
    41.31, 12 A  
    41.61, 16 A  
2 = 2 pole for  
    41.52, 8 A
- Coil version** —————  
6 = DC bistable, 2 coils  
8 = AC  
9 = DC
- Coil voltage** —————  
See coil specifications

- A: Contact material**  
0 = Standard AgNi  
4 = AgSnO<sub>2</sub>  
5 = AgNi + Au
- B: Contact circuit**  
0 = CO (nPDT)  
3 = NO (nPST)

- D: Special versions**  
0 = Flux proof (RT II)  
1 = Wash tight (RT III)  
6 = Bistable version (RT II)
- C: Options**  
0 = Production line 0  
1 = Production line 1

**Selecting features and options: only combinations in the same row are possible.**  
Preferred selections for best availability are shown in **bold**.

Type	Coil version	A	B	C	D
41.31	DC	<b>0</b> - 4 - 5	<b>0</b> - 3	<b>1</b>	<b>0</b> - 1
41.52	DC	<b>0</b> - 5	<b>0</b> - 3	<b>1</b>	<b>0</b> - 1
41.61	DC	<b>0</b> - 4	<b>0</b> - 3	<b>1</b>	<b>0</b> - 1
41.31/52/61	AC	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>
41.52	DC bistable	4	<b>0</b>	<b>1</b>	<b>6</b>
41.61	DC bistable	4	<b>0</b> - 3	<b>1</b>	<b>6</b>

### Solid state relay (SSR)

Example: 41 series SSR relay, 5 A output, 24 V DC supply.



- Series** —————
- Type** —————  
8 = SSR type
- Output** —————  
1 = 1 NO (SPST-NO)
- Input circuit** —————  
See coil specifications

- Output circuit**  
9024 = 5 A - 24 V DC  
8240 = 3 A - 240 V AC

*Electromechanical relay*

A


**Technical data**

<b>Insulation according to EN 61810-1</b>								
		<b>1 pole</b>		<b>1 pole bistable</b>	<b>2 pole</b>		<b>2 pole bistable</b>	
Nominal voltage of supply system	V AC	230/400		230/400	230/400		230/400	
Rated insulation voltage	V AC	250	400	250	250	400	250	
Pollution degree		3	2	2	3	2	2	
<b>Insulation between coil and contact set</b>								
Type of insulation		Reinforced (8 mm)		Reinforced (10 mm)	Reinforced (8 mm)		Reinforced (10 mm)	
Overvoltage category		III		III	III		III	
Rated impulse voltage	kV (1.2/50 µs)	6		6	6		6	
Dielectric strength	V AC	4000		4000	4000		4000	
<b>Insulation between adjacent contacts</b>								
Type of insulation		—		—	Basic		Basic	
Overvoltage category		—		—	III		III	
Rated impulse voltage	kV (1.2/50 µs)	—		—	4		4	
Dielectric strength	V AC	—		—	2000		2000	
<b>Insulation between open contacts</b>								
Type of disconnection		Micro-disconnection			Micro-disconnection			
Dielectric strength	V AC/kV (1.2/50 µs)	1000/1.5			1000/1.5			
<b>Conducted disturbance immunity</b>								
Burst (5...50)ns, 5 kHz, on A1 - A2		EN 61000-4-4			level 4 (4 kV)			
Surge (1.2/50 µs) on A1 - A2 (differential mode)		EN 61000-4-5			level 3 (2 kV)			
<b>Other data</b>								
Bounce time: NO/NC	ms	4/6 (monostable) - 2/10 (bistable)						
Vibration resistance (5...55)Hz: NO/NC	g	15/2 (monostable) - 5/3 (bistable)						
Shock resistance	g	16 (monostable) - 10 (bistable)						
Power lost to the environment	without contact current	W	0.4 (monostable)					
	with rated current	W	1.7 (41.31)		1.2 (41.52)		1.8 (41.61)	
Recommended distance between relays mounted on PCB	mm	≥ 5						

## Contact specification


### F 41 - Electrical life (AC) v contact current (monostable)

Types 41.31/61

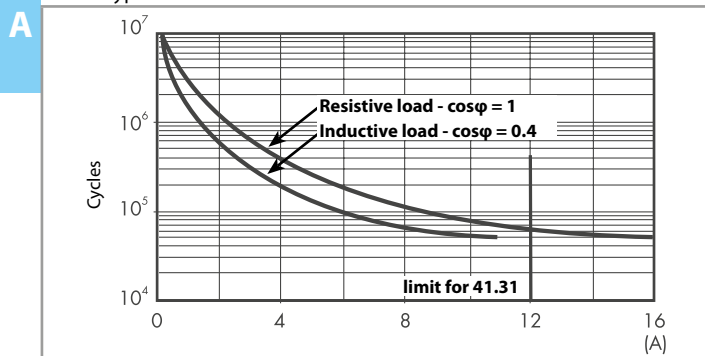


### F 41 - Electrical life (AC) v contact current (monostable)


Type 41.52

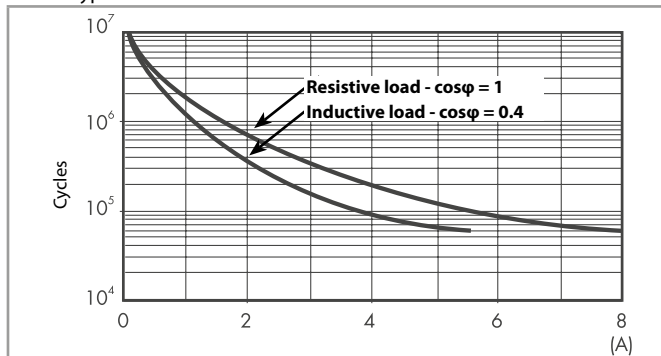

### F 41 - Electrical life (AC) v contact current (bistable)

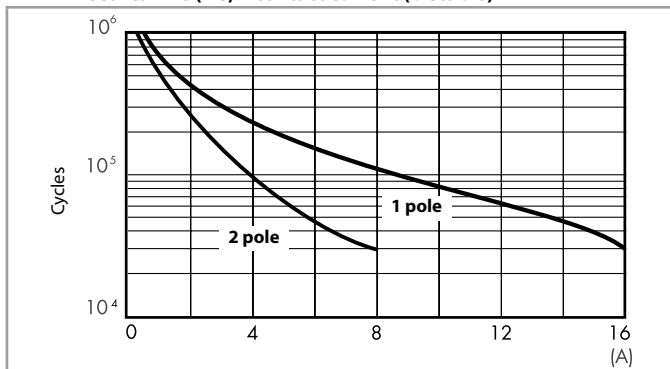

### H 41 - Maximum DC1 breaking capacity

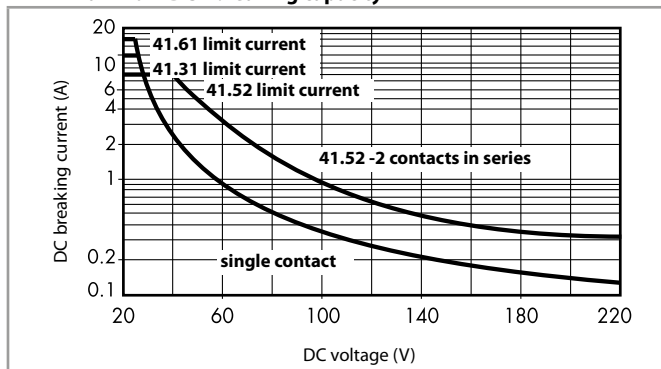

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of  $\geq 100 \cdot 10^3$  can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load. Note: the release time for the load will be increased.

## Coil specifications

### AC coil data

Nominal voltage	Coil code	Operating range		Resistance	Rated coil consumption
		$U_{min}$	$U_{max}$		
$U_N$		V	V	$R$	$I$ at $U_N$
V		V	V	$\Omega$	mA
24	8.024	19.2	26.4	350	31.6
230	8.230	184	253	32500	3.2


### DC coil data

Nominal voltage	Coil code	Operating range		Resistance	Rated coil consumption
		$U_{min}$	$U_{max}$		
$U_N$		V	V	$R$	$I$ at $U_N$
V		V	V	$\Omega$	mA
5	9.005	3.5	7.5	62	80
6	9.006	4.2	9	90	66.7
12	9.012	8.4	18	360	33.3
24	9.024	16.8	36	1440	16.7
48	9.048	33.6	72	5760	8.3
60	9.060	42	90	9000	6.6
110	9.110	77	165	24200	4.5

### DC coil data (bistable)


Nominal voltage	Coil code	Operating range			Resistance	Rated coil power
		Set	Reset	Set/Reset		
$U_N$		$U_{min}$	$U_{min}$	$U_{max}$	$R$	$I$ at $U_N$
V		V	V	V	$\Omega$	mW
5	6.005	3.5	3.5	5.5	38	650
12	6.012	8.4	8.4	13.2	220	650
24	6.024	16.8	16.8	26.4	885	650

### R 41 - AC coil operating range v ambient temperature

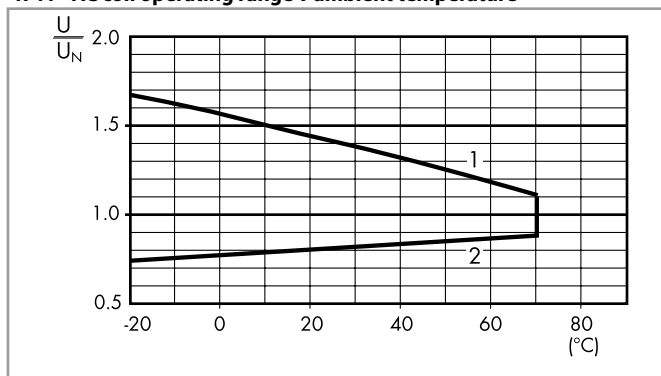

- 1 - Max. permitted coil voltage.
- 2 - Min. pick-up voltage with coil at ambient temperature.

### R 41 - DC coil operating range v ambient temperature

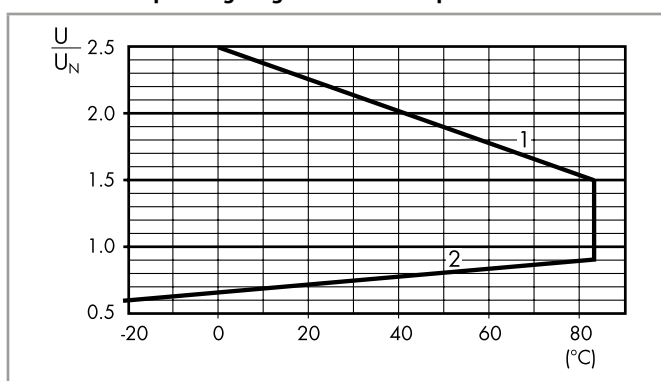

- 1 - Max. permitted coil voltage.
- 2 - Min. pick-up voltage with coil at ambient temperature.

**Solid state relay**

**Technical data**

Other data		41.81 - 9024		41.81 - 8240	
Power lost to the environment	without current	W	0.25		0.25
	with maximum current	W	1.75		3.5


**Input specification**

**Input data - DC types**


Nominal voltage $U_N$	Input code	Operating range		Release voltage	Impedance	Control current I at $U_N$
		$U_{min}$	$U_{max}$			
V		V	V	V	$\Omega$	mA
12	7.012	8	17	4	1550	5.5
24	7.024	14	32	9	2600	9

**Output specification**

**L 41 - Output current v ambient temperature**  
SSR - 5 A DC output types

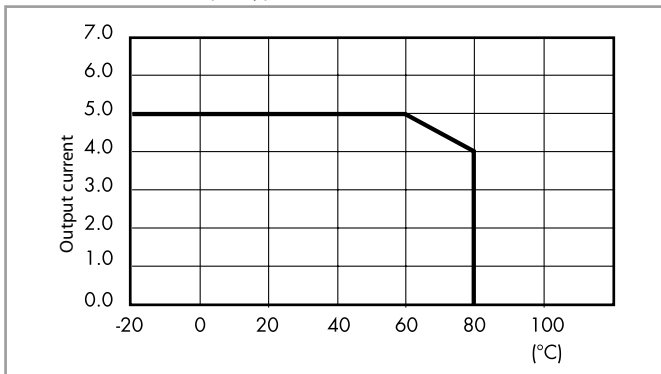

**L 41 - Output current v ambient temperature**  
SSR - 3 A AC output types

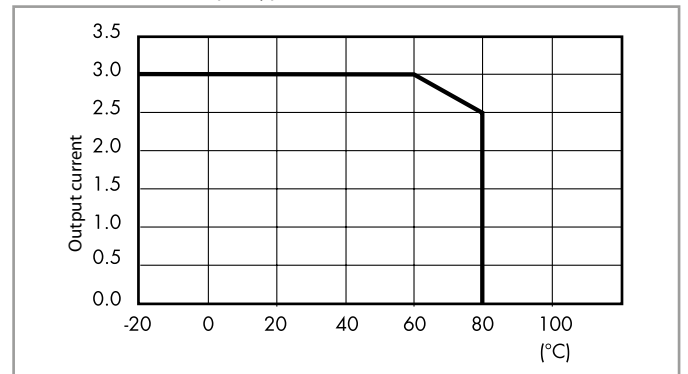


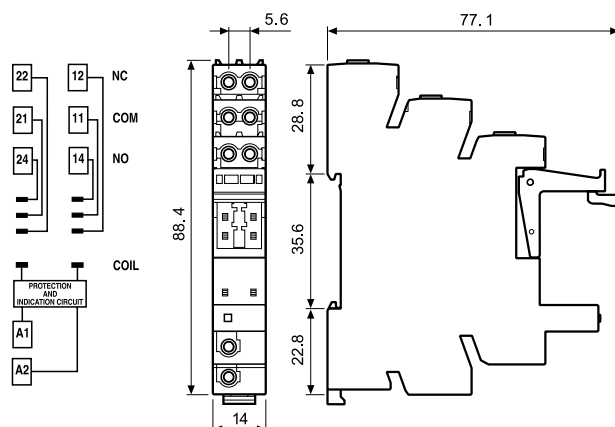
A



93.02

Approvals  
(according to type):**Screw terminal socket 35 mm (EN 60715) mounting**

Supply voltage	Relay type	Socket type	
6 V AC/DC	41.52.9.005.0010 or 41.61.9.005.0010	93.02.0.024	
12 V AC/DC	41.52.9.012.0010 or 41.61.9.012.0010	93.02.0.024	
24 V AC/DC	41.52/61.9.024.0010 or 41.81.7.024.xxxx	93.02.0.024	
60 V AC/DC	41.52.9.060.0010 or 41.61.9.060.0010	93.02.0.060	
(110...125)V AC/DC	41.52.9.110.0010 or 41.61.9.110.0010	93.02.0.125	
(220...240)V AC/DC	41.52.9.110.0010 or 41.61.9.110.0010	93.02.0.240	
(230...240)V AC	41.52.9.110.0010 or 41.61.9.110.0010	93.02.8.230	
6 V DC	41.52.9.005.0010 or 41.61.9.005.0010	93.02.7.024	
12 V DC	41.52/61.9.012.0010 or 41.81.7.012.xxxx	93.02.7.024	
24 V DC	41.52/61.9.024.0010 or 41.81.7.024.xxxx	93.02.7.024	
48 V DC	41.52.9.048.0010 or 41.61.9.048.0010	93.02.7.060	
60 V DC	41.52.9.060.0010 or 41.61.9.060.0010	93.02.7.060	
<b>Accessories</b>			
8-way jumper link	093.08 (see specification next page)		
Plastic separator	093.01 (see specification next page)		
Sheet of marker tags, 72 tags	060.72 (see specification next page)		
<b>Technical data</b>			
Rated values	10 A - 250 V		
Dielectric strength	6 kV (1.2/50 $\mu$ s) between coil and contacts		
Protection category	IP 20		
Ambient temperature ( $U_N \leq 60$ V / > 60 V)	°C -40...+70/-40...+55		
 Screw torque	Nm	0.5	
Wire strip length	mm	8	
Max. wire size for 93.02 socket	solid wire	stranded wire	
	mm <sup>2</sup>	1 x 6 / 2 x 2.5	1 x 4 / 2 x 2.5
	AWG	1 x 10 / 2 x 14	1 x 12 / 2 x 14




Note: Not for bistable relays





93.52

Approvals  
(according to type):



**Screw terminal socket 35 mm (EN 60715) mounting**


Supply voltage	Relay type	Socket type
6 V AC/DC	41.52.9.005.0010 or 41.61.9.005.0010	93.52.0.024
12 V AC/DC	41.52.9.012.0010 or 41.61.9.012.0010	93.52.0.024
24 V AC/DC	41.52/61.9.024.0010 or 41.81.7.024.xxxx	93.52.0.024
60 V AC/DC	41.52.9.060.0010 or 41.61.9.060.0010	93.52.0.060
(110...125)V AC/DC	41.52.9.110.0010 or 41.61.9.110.0010	93.52.0.125
(220...240)V AC/DC	41.52.9.110.0010 or 41.61.9.110.0010	93.52.0.240
(230...240)V AC	41.52.9.110.0010 or 41.61.9.110.0010	93.52.8.230
6 V DC	41.52.9.005.0010 or 41.61.9.005.0010	93.52.7.024
12 V DC	41.52/61.9.012.0010 or 41.81.7.012.xxxx	93.52.7.024
24 V DC	41.52/61.9.024.0010 or 41.81.7.024.xxxx	93.52.7.024
48 V DC	41.52.9.048.0010 or 41.61.9.048.0010	93.52.7.060
60 V DC	41.52.9.060.0010 or 41.61.9.060.0010	93.52.7.060

**Accessories**

8-way jumper link	093.08 (see table below)
Plastic separator	093.01 (see table below)
Sheet of marker tags, 72 tags	060.72 (see table below)

**Technical data**

Rated values	10 A - 250 V		
Dielectric strength	6 kV (1.2/50 μs) between coil and contacts		
Protection category	IP 20		
Ambient temperature (U <sub>N</sub> ≤ 60 V / > 60 V)	°C	-40...+70/-40...+55	
Wire strip length	mm	8	
Max. wire size for 93.52 socket	solid wire	stranded wire	
	mm <sup>2</sup>	1 x 2.5	1 x 2.5
	AWG	1 x 14	1 x 14

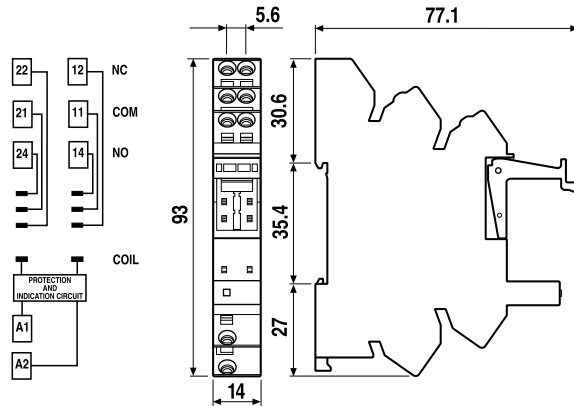

Note: Not for bistable relays

**Accessories**




093.08

Approvals  
(according to type):



8-way jumper link for 93.02 and 93.52 sockets	093.08 (blue)	093.08.0 (black)	093.08.1 (red)
Rated values	10 A - 250 V		

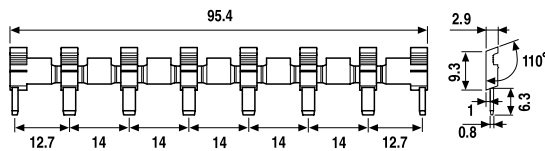

Plastic separator for 93.02 and 93.52 sockets	093.01
---	--------

Thickness 2 mm, required at the start and the end of a group of interfaces.

Can be used for visual separation group, must be used for:

- protective separation of different voltages of neighbouring PLC interfaces according to VDE 0106-101
- protection of cut jumper links

Sheet of marker tags for 38 x 2, plastic, 72 tags, 6 x 12 mm	060.72
--	--------



093.01



060.72

A



95.13.2



95.15.2


Approvals  
(according to type):



PCB socket	95.13.2 (blue)	95.13.20 (black)	95.15.2 (blue)	95.15.20 (black)
For relay type	41.31		41.52, 41.61, 41.81 <sup>(1)</sup>	
<b>Accessories</b>				
Plastic retaining clip	095.42			
<b>Technical data</b>				
Rated values	10 A - 250 V*			
Dielectric strength	6 kV (1.2/50 μs) between coil and contacts			
Protection category	IP 20			
Ambient temperature	°C -40...+70			

\* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).

<sup>(1)</sup> With the relay 41.81 the NO change-over contact will be 11-14.

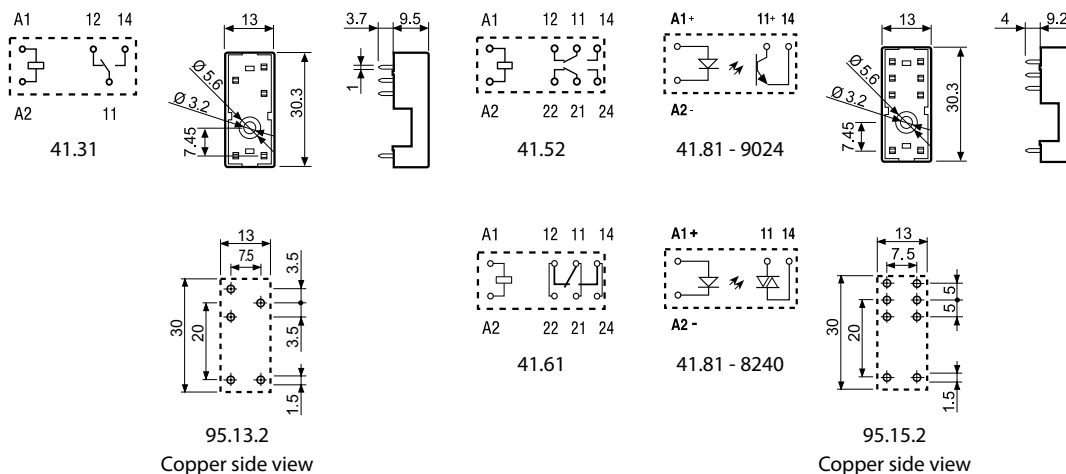

Note: Not for bistable relays

## Packaging codes

How to code and identify retaining clip and packaging options for sockets.

Example:

