

SOT-23



SOT-323



**Pin Definition:**

1. Gate
2. Source
3. Drain

**PRODUCT SUMMARY**

$V_{DS}$ (V)	$R_{DS(on)}$ ( $\Omega$ )	$I_D$ (mA)
60	5 @ $V_{GS} = 10V$	100
	5.5 @ $V_{GS} = 5V$	100


**Features**

- Low On-Resistance
- ESD Protection
- High Speed Switching
- Low Voltage Drive

**Ordering Information**

Part No.	Package	Packing
TSM2N7002KCX RF	SOT-23	3Kpcs / 7" Reel
TSM2N7002KCU RF	SOT-323	3Kpcs / 7" Reel

**Block Diagram**

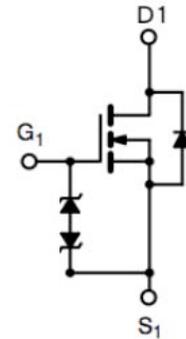

N-Channel MOSFET

**Absolute Maximum Rating** ( $T_a = 25^\circ C$  unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	60	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Drain Current	Continuous @ $T_A=25^\circ C$	$I_D$	300
	Pulsed	$I_{DM}$	700
Drain Reverse Current	Continuous @ $T_A=25^\circ C$	$I_{DR}$	300
	Pulsed	$I_{DMR}$	700
Maximum Power Dissipation	$P_D$	200	mW
Operating Junction Temperature	$T_J$	+150	$^\circ C$
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ C$

**Thermal Performance**

Parameter	Symbol	Limit	Unit
Lead Temperature (1/8" from case)	$T_L$	5	S
Junction to Ambient Thermal Resistance (PCB mounted)	$R_{\theta JA}$	350	$^\circ C/W$

Notes:


- a. Pulse width  $\leq 300\mu s$ , Duty cycle  $\leq 2\%$
- b. When the device is mounted on a glass epoxy board with area measuring 1 x 0.75 x 0.62 inch.
- c. The power dissipation of the package may result in a continuous drain current.

### Electrical Specifications (Ta = 25°C, unless otherwise noted)


Parameter	Conditions	Symbol	Min	Typ	Max	Unit
<b>Static</b>						
Drain-Source Breakdown Voltage	V <sub>GS</sub> = 0V, I <sub>D</sub> = 10μA	BV <sub>DSS</sub>	60	--	--	V
Gate Threshold Voltage	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250μA	V <sub>GS(TH)</sub>	1.0	--	2.5	V
Gate Body Leakage	V <sub>GS</sub> = ±20V, V <sub>DS</sub> = 0V	I <sub>GSS</sub>	--	--	±10	μA
Zero Gate Voltage Drain Current	V <sub>DS</sub> = 60V, V <sub>GS</sub> = 0V	I <sub>DSS</sub>	--	--	1.0	μA
Drain-Source On-State Resistance	V <sub>GS</sub> = 10V, I <sub>D</sub> = 100mA	R <sub>DS(ON)</sub>	--	3	5	Ω
	V <sub>GS</sub> = 5V, I <sub>D</sub> = 100mA		--	3.6	5.5	
Forward Transconductance	V <sub>DS</sub> = 10V, I <sub>D</sub> = 200mA	g <sub>fs</sub>	100	--	--	mS
Diode Forward Voltage	I <sub>S</sub> = 300mA, V <sub>GS</sub> = 0V	V <sub>SD</sub>	--	0.9	1.2	V
<b>Dynamic<sup>b</sup></b>						
Total Gate Charge	V <sub>DS</sub> = 10V, I <sub>D</sub> = 250mA, V <sub>GS</sub> = 4.5V	Q <sub>g</sub>	--	0.4	--	nC
Input Capacitance	V <sub>DS</sub> = 25V, V <sub>GS</sub> = 0V, f = 1.0MHz	C <sub>iss</sub>	--	7.32	--	pF
Output Capacitance		C <sub>oss</sub>	--	3.42	--	
Reverse Transfer Capacitance		C <sub>rss</sub>	--	7.63	--	
<b>Switching<sup>c</sup></b>						
Turn-On Delay Time	V <sub>DD</sub> = 30V, R <sub>G</sub> = 10Ω	t <sub>d(on)</sub>	--	25	--	nS
Turn-Off Delay Time	I <sub>D</sub> = 100mA, V <sub>GEN</sub> = 10V,	t <sub>d(off)</sub>	--	35	--	

Notes:

- a. pulse test: PW ≤ 300μs, duty cycle ≤ 2%
- b. For DESIGN AID ONLY, not subject to production testing.
- b. Switching time is essentially independent of operating temperature.

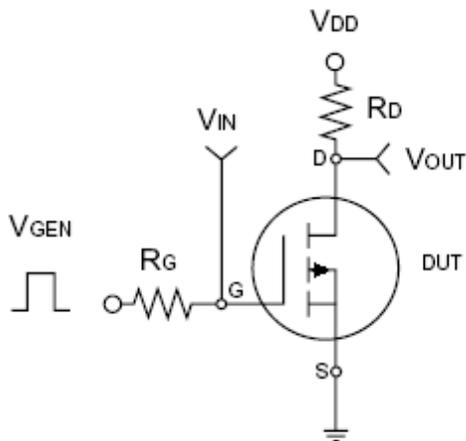


Switching Test Circuit

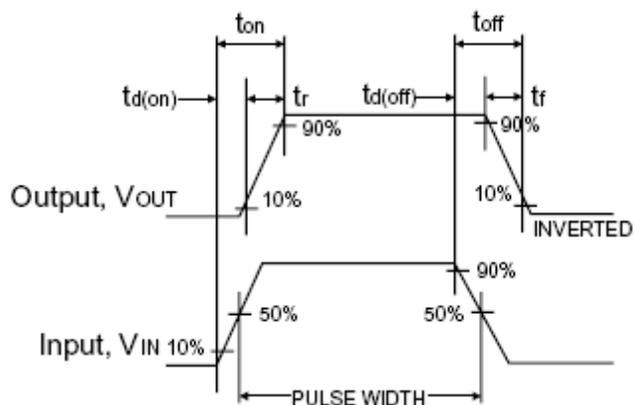


Switchin Waveforms

**Electrical Characteristics Curve** (Ta = 25°C, unless otherwise noted)


**Output Characteristics**

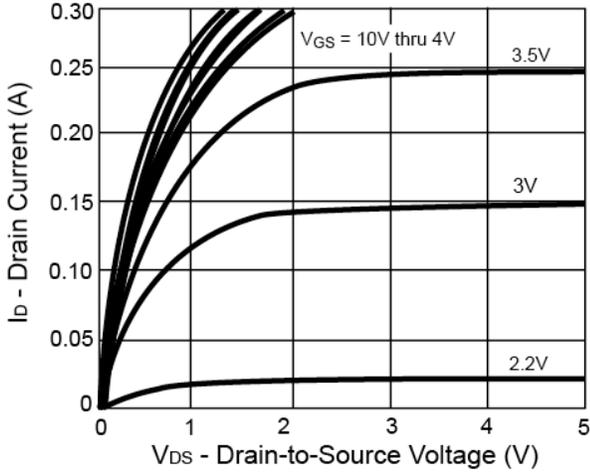


**Transfer Characteristics**

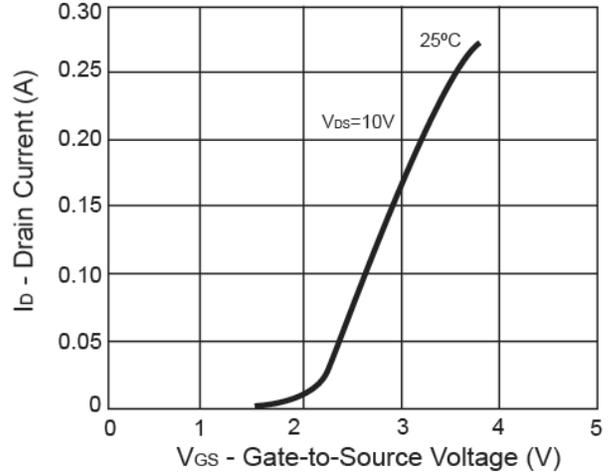


**On-Resistance vs. Drain Current**

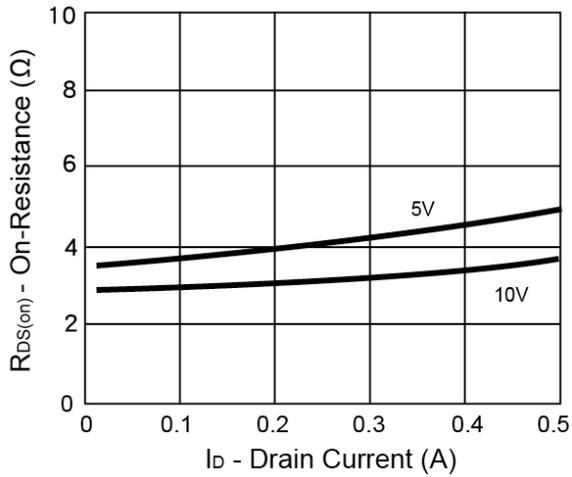


**Gate Charge**

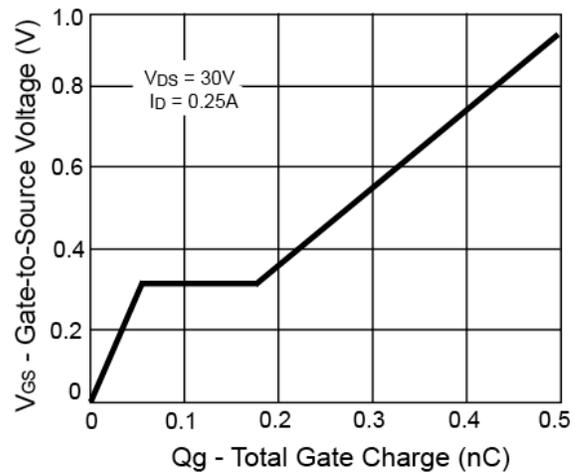

**On-Resistance vs. Junction Temperature**

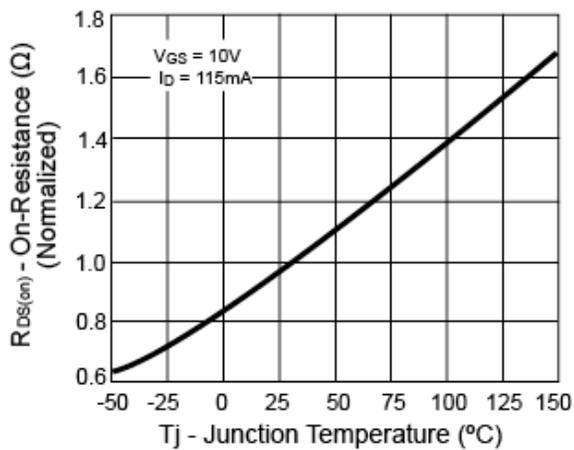


**Source-Drain Diode Forward Voltage**

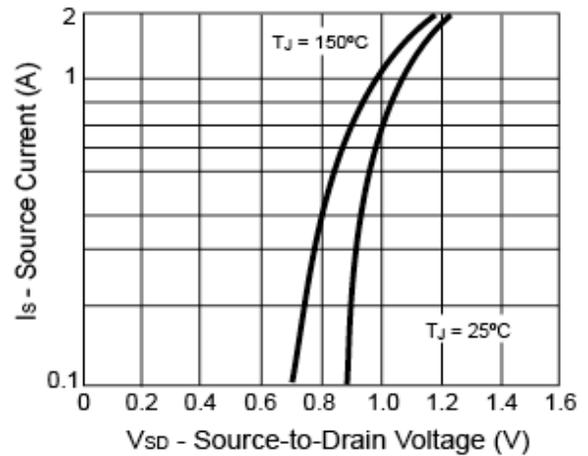


**Electrical Characteristics Curve** (Ta = 25°C, unless otherwise noted)


**On-Resistance vs. Gate-Source Voltage**

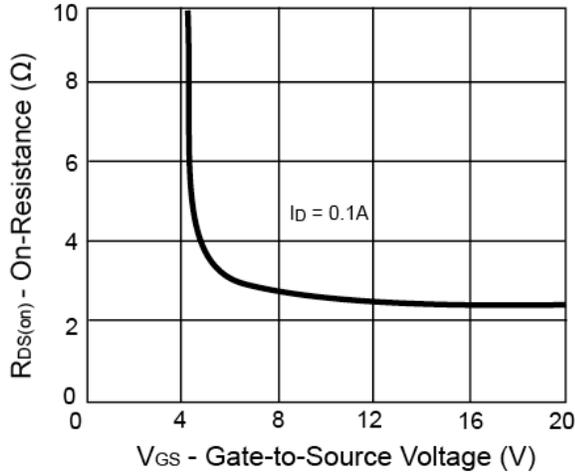


**Threshold Voltage**

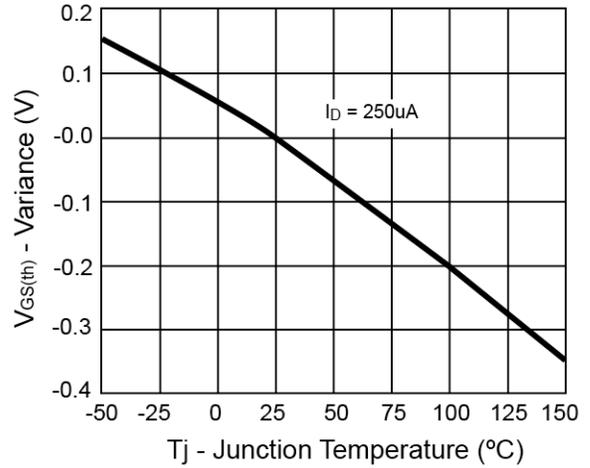


**Single Pulse Power**

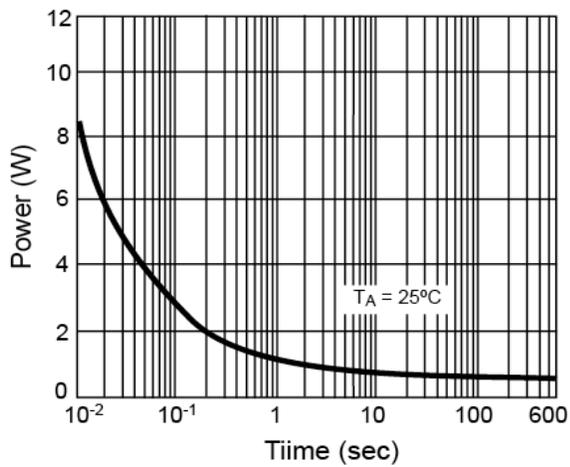

**Normalized Thermal Transient Impedance, Junction-to-Ambient**

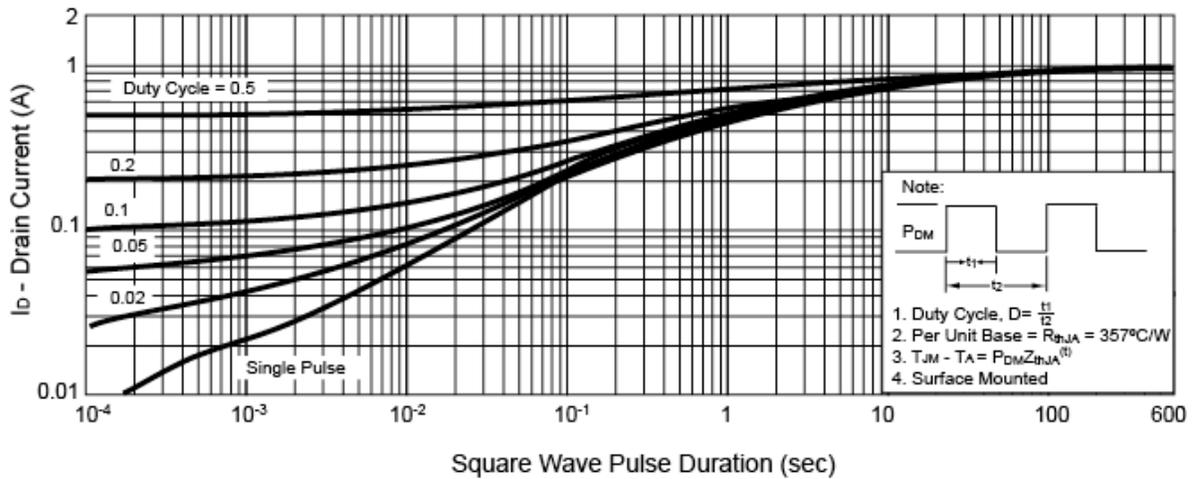


**SOT-23 Mechanical Drawing**

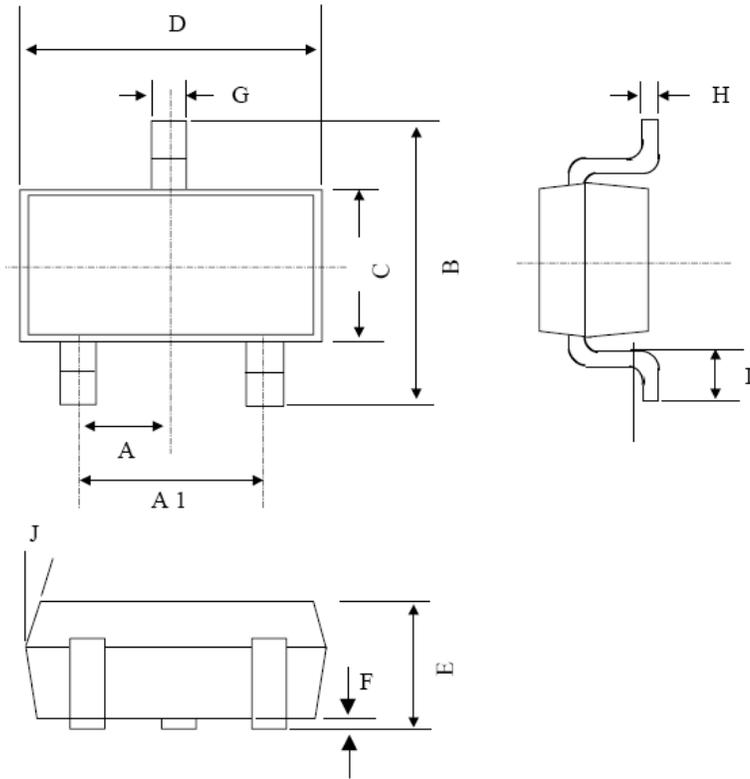

SOT-23 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX.
A	0.95 BSC		0.037 BSC	
A1	1.9 BSC		0.074 BSC	
B	2.60	3.00	0.102	0.118
C	1.40	1.70	0.055	0.067
D	2.80	3.10	0.110	0.122
E	1.00	1.30	0.039	0.051
F	0.00	0.10	0.000	0.004
G	0.35	0.50	0.014	0.020
H	0.10	0.20	0.004	0.008
I	0.30	0.60	0.012	0.024
J	5°	10°	5°	10°

**SOT-323 Mechanical Drawing**

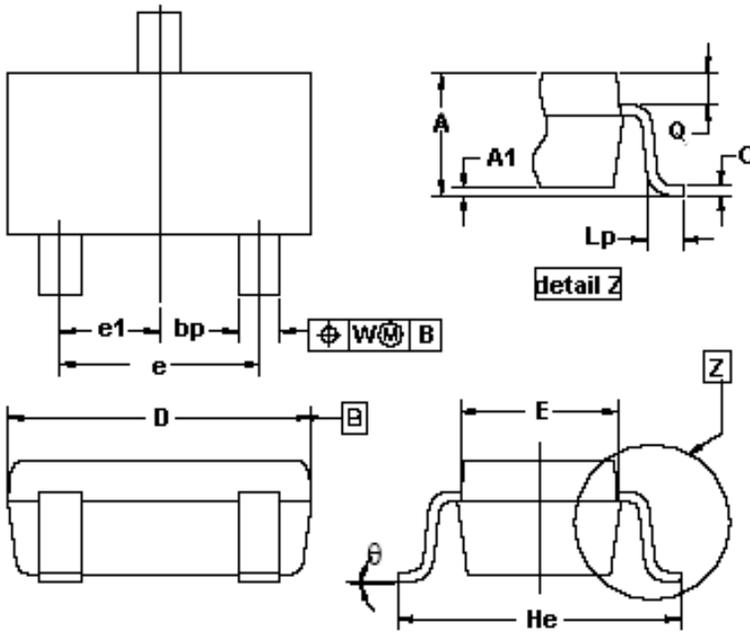

SOT-323 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.80	1.10	0.0315	0.0433
A1	--	0.10	--	0.0039
bp	0.30	0.40	0.0118	0.0157
C	0.10	0.25	0.0039	0.0098
D	1.80	2.20	0.0709	0.0866
E	1.15	1.35	0.0453	0.0531
e	1.30	--	0.0512	--
e1	0.65	--	0.0256	--
He	2.00	2.20	0.0787	0.0866
Lp	0.15	0.45	0.0059	0.0177
Q	0.13	0.23	0.0051	0.0091
W	0.20	--	0.0079	--
$\theta$	10°	--	10°	--

### Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.