


- Designed for Complementary Use with the BD249 Series
- 125 W at 25°C Case Temperature
- 25 A Continuous Collector Current
- 40 A Peak Collector Current
- Customer-Specified Selections Available

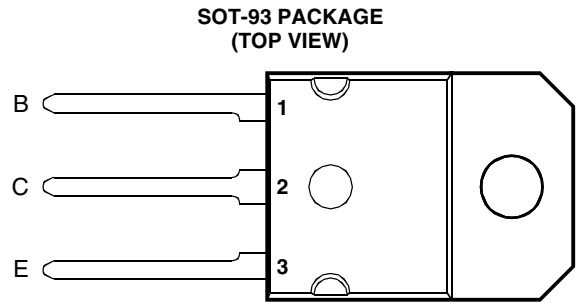

Pin 2 is in electrical contact with the mounting base.

MDTRAAA

**absolute maximum ratings at 25°C case temperature (unless otherwise noted)**

| RATING                                                                             |        | SYMBOL              | VALUE       | UNIT |
|------------------------------------------------------------------------------------|--------|---------------------|-------------|------|
| Collector-emitter voltage ( $R_{BE} = 100 \Omega$ )                                | BD250  | $V_{CER}$           | -55         | V    |
|                                                                                    | BD250A |                     | -70         |      |
|                                                                                    | BD250B |                     | -90         |      |
|                                                                                    | BD250C |                     | -115        |      |
| Collector-emitter voltage ( $I_C = -30 \text{ mA}$ )                               | BD250  | $V_{CEO}$           | -45         | V    |
|                                                                                    | BD250A |                     | -60         |      |
|                                                                                    | BD250B |                     | -80         |      |
|                                                                                    | BD250C |                     | -100        |      |
| Emitter-base voltage                                                               |        | $V_{EBO}$           | -5          | V    |
| Continuous collector current                                                       |        | $I_C$               | -25         | A    |
| Peak collector current (see Note 1)                                                |        | $I_{CM}$            | -40         | A    |
| Continuous base current                                                            |        | $I_B$               | -5          | A    |
| Continuous device dissipation at (or below) 25°C case temperature (see Note 2)     |        | $P_{tot}$           | 125         | W    |
| Continuous device dissipation at (or below) 25°C free air temperature (see Note 3) |        | $P_{tot}$           | 3           | W    |
| Unclamped inductive load energy (see Note 4)                                       |        | $\frac{1}{2}LI_C^2$ | 90          | mJ   |
| Operating junction temperature range                                               |        | $T_j$               | -65 to +150 | °C   |
| Storage temperature range                                                          |        | $T_{stg}$           | -65 to +150 | °C   |
| Lead temperature 3.2 mm from case for 10 seconds                                   |        | $T_L$               | 250         | °C   |

NOTES: 1. This value applies for  $t_p \leq 0.3 \text{ ms}$ , duty cycle  $\leq 10\%$ .  
2. Derate linearly to 150°C case temperature at the rate of 1 W/°C.  
3. Derate linearly to 150°C free air temperature at the rate of 24 mW/°C.  
4. This rating is based on the capability of the transistor to operate safely in a circuit of:  $L = 20 \text{ mH}$ ,  $I_{B(on)} = -0.4 \text{ A}$ ,  $R_{BE} = 100 \Omega$ ,  $V_{BE(off)} = 0$ ,  $R_S = 0.1 \Omega$ ,  $V_{CC} = -20 \text{ V}$ .

**PRODUCT INFORMATION**

**electrical characteristics at 25°C case temperature**

| PARAMETER                                              | TEST CONDITIONS                                                                                               |                                                                          |                                     | MIN                       | TYP | MAX                          | UNIT |
|--------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-------------------------------------|---------------------------|-----|------------------------------|------|
| $V_{(BR)CEO}$ Collector-emitter breakdown voltage      | $I_C = -30 \text{ mA}$<br>(see Note 5)                                                                        | $I_B = 0$                                                                | BD250<br>BD250A<br>BD250B<br>BD250C | -45<br>-60<br>-80<br>-100 |     |                              | V    |
| $I_{CES}$ Collector-emitter cut-off current            | $V_{CE} = -55 \text{ V}$<br>$V_{CE} = -70 \text{ V}$<br>$V_{CE} = -90 \text{ V}$<br>$V_{CE} = -115 \text{ V}$ | $V_{BE} = 0$<br>$V_{BE} = 0$<br>$V_{BE} = 0$<br>$V_{BE} = 0$             | BD250<br>BD250A<br>BD250B<br>BD250C |                           |     | -0.7<br>-0.7<br>-0.7<br>-0.7 | mA   |
| $I_{CEO}$ Collector cut-off current                    | $V_{CE} = -30 \text{ V}$<br>$V_{CE} = -60 \text{ V}$                                                          | $I_B = 0$<br>$I_B = 0$                                                   | BD250/250A<br>BD250B/250C           |                           |     | -1<br>-1                     | mA   |
| $I_{EBO}$ Emitter cut-off current                      | $V_{EB} = -5 \text{ V}$                                                                                       | $I_C = 0$                                                                |                                     |                           |     | -1                           | mA   |
| $h_{FE}$ Forward current transfer ratio                | $V_{CE} = -4 \text{ V}$<br>$V_{CE} = -4 \text{ V}$<br>$V_{CE} = -4 \text{ V}$                                 | $I_C = -1.5 \text{ A}$<br>$I_C = -15 \text{ A}$<br>$I_C = -25 \text{ A}$ | (see Notes 5 and 6)                 | 25<br>10<br>5             |     |                              |      |
| $V_{CE(sat)}$ Collector-emitter saturation voltage     | $I_B = -1.5 \text{ A}$<br>$I_B = -5 \text{ A}$                                                                | $I_C = -15 \text{ A}$<br>$I_C = -25 \text{ A}$                           | (see Notes 5 and 6)                 |                           |     | -1.8<br>-4                   | V    |
| $V_{BE}$ Base-emitter voltage                          | $V_{CE} = -4 \text{ V}$<br>$V_{CE} = -4 \text{ V}$                                                            | $I_C = -15 \text{ A}$<br>$I_C = -25 \text{ A}$                           | (see Notes 5 and 6)                 |                           |     | -2<br>-4                     | V    |
| $h_{fe}$ Small signal forward current transfer ratio   | $V_{CE} = -10 \text{ V}$                                                                                      | $I_C = -1 \text{ A}$                                                     | $f = 1 \text{ kHz}$                 | 25                        |     |                              |      |
| $ h_{fe} $ Small signal forward current transfer ratio | $V_{CE} = -10 \text{ V}$                                                                                      | $I_C = -1 \text{ A}$                                                     | $f = 1 \text{ MHz}$                 | 3                         |     |                              |      |

NOTES: 5. These parameters must be measured using pulse techniques,  $t_p = 300 \mu\text{s}$ , duty cycle  $\leq 2\%$ .

6. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

**thermal characteristics**

| PARAMETER                                               | MIN | TYP | MAX | UNIT |
|---------------------------------------------------------|-----|-----|-----|------|
| $R_{\theta JC}$ Junction to case thermal resistance     |     |     | 1   | °C/W |
| $R_{\theta JA}$ Junction to free air thermal resistance |     |     | 42  | °C/W |


**resistive-load-switching characteristics at 25°C case temperature**

| PARAMETER               | TEST CONDITIONS †           |                              |                                        | MIN | TYP | MAX | UNIT          |
|-------------------------|-----------------------------|------------------------------|----------------------------------------|-----|-----|-----|---------------|
| $t_{on}$ Turn-on time   | $I_C = -5 \text{ A}$        | $I_{B(on)} = -0.5 \text{ A}$ | $I_{B(off)} = 0.5 \text{ A}$           |     | 0.2 |     | $\mu\text{s}$ |
| $t_{off}$ Turn-off time | $V_{BE(off)} = 5 \text{ V}$ | $R_L = 5 \Omega$             | $t_p = 20 \mu\text{s}$ , dc $\leq 2\%$ |     | 0.4 |     | $\mu\text{s}$ |

† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.


**TYPICAL CHARACTERISTICS**

**TYPICAL DC CURRENT GAIN  
vs  
COLLECTOR CURRENT**

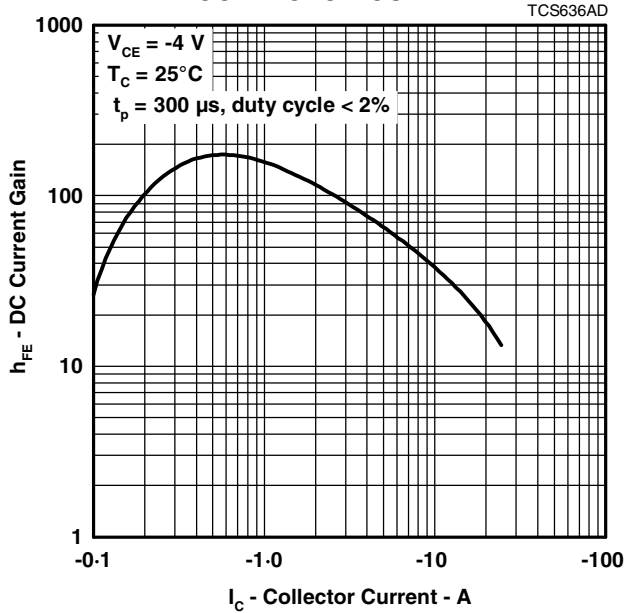


**Figure 1.**

**COLLECTOR-EMITTER SATURATION VOLTAGE  
vs  
BASE CURRENT**

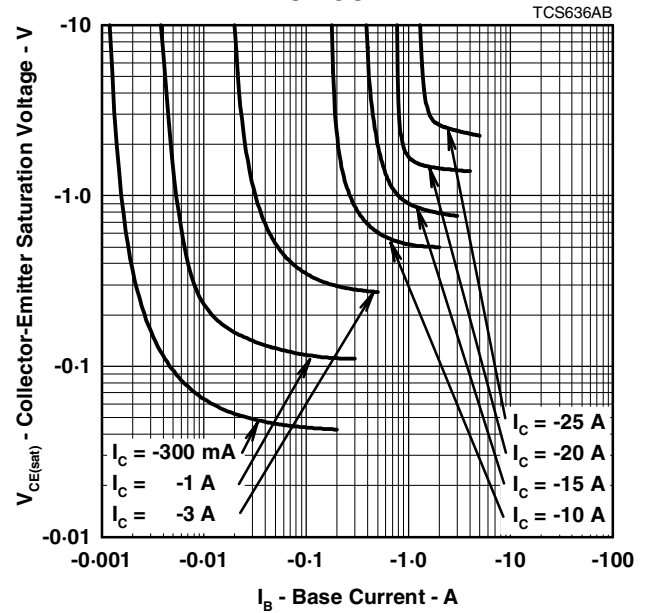

**Figure 2.**

**BASE-EMITTER VOLTAGE  
vs  
COLLECTOR CURRENT**

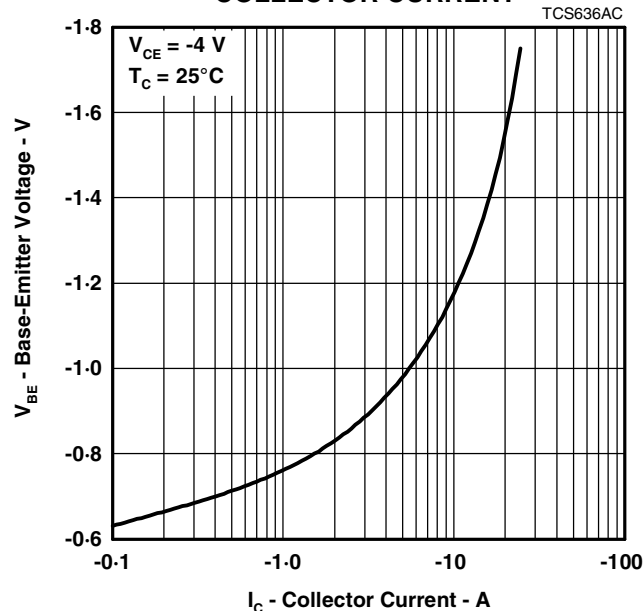

**Figure 3.**

**PRODUCT INFORMATION**

JUNE 1973 - REVISED SEPTEMBER 2002  
 Specifications are subject to change without notice.

## MAXIMUM SAFE OPERATING REGIONS

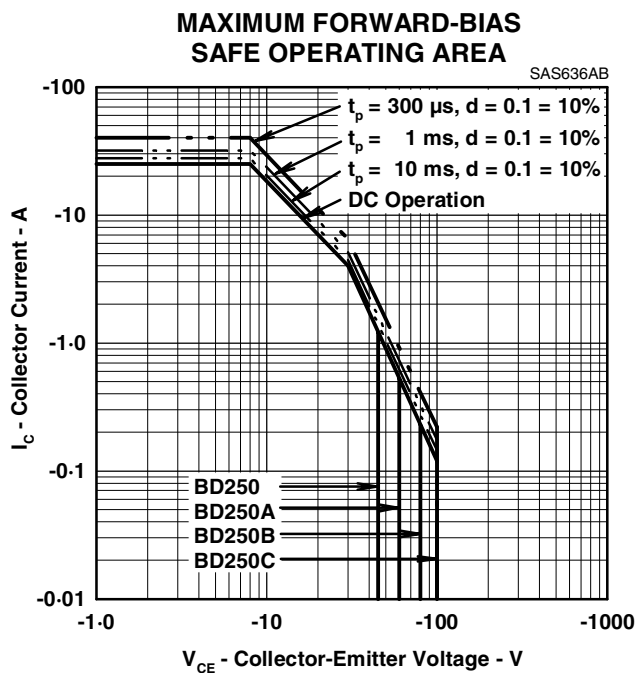


Figure 4.

## THERMAL INFORMATION

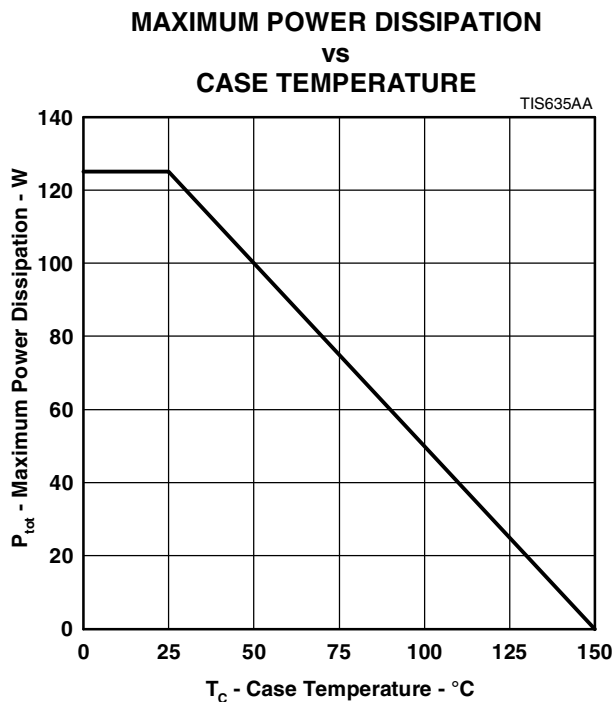



Figure 5.

## PRODUCT INFORMATION

JUNE 1973 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.

## SOT-93

This single-in-line package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high humidity conditions. Leads require no additional cleaning or processing when used in soldered assembly.



MDXXAW

JUNE 1973 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.