








SB220 – SB260





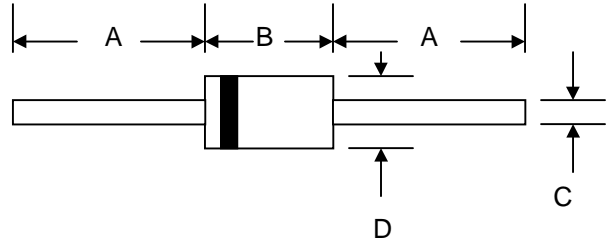

2.0A SCHOTTKY BARRIER RECTIFIER

Features

-  Schottky Barrier Chip
-  Guard Ring Die Construction for Transient Protection
-  High Current Capability
-  Low Power Loss, High Efficiency
-  High Surge Current Capability
-  For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications



Mechanical Data

-  Case: Molded Plastic
-  Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
-  Polarity: Cathode Band
-  Weight: 0.40 grams (approx.)
-  Mounting Position: Any
-  Marking: Type Number

DO-15		
Dim	Min	Max
A	25.4	—
B	5.50	7.62
C	0.71	0.864
D	2.60	3.60
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ $T_A=25^\circ\text{C}$ unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	SB220	SB230	SB240	SB250	SB260	Unit
Peak Repetitive Reverse Voltage	V_{RRM}						V
Working Peak Reverse Voltage	V_{RWM}	20	30	40	50	60	
DC Blocking Voltage	V_R						
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	35	42	V
Average Rectified Output Current (Note 1) @ $T_L = 100^\circ\text{C}$	I_O	2.0					A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50					A
Forward Voltage @ $I_F = 2.0\text{A}$	V_{FM}	0.50			0.70		V
Peak Reverse Current @ $T_A = 25^\circ\text{C}$ At Rated DC Blocking Voltage @ $T_A = 100^\circ\text{C}$	I_{RM}	0.5 10					mA
Typical Junction Capacitance (Note 2)	C_j	170			140		pF
Typical Thermal Resistance Junction to Lead	$R_{\theta JL}$	15					K/W
Typical Thermal Resistance Junction to Ambient (Note 1)	$R_{\theta JA}$	50					K/W
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150					$^\circ\text{C}$

Note: 1. Valid provided that leads are kept at ambient temperature at a distance of 9.5mm from the case.
2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

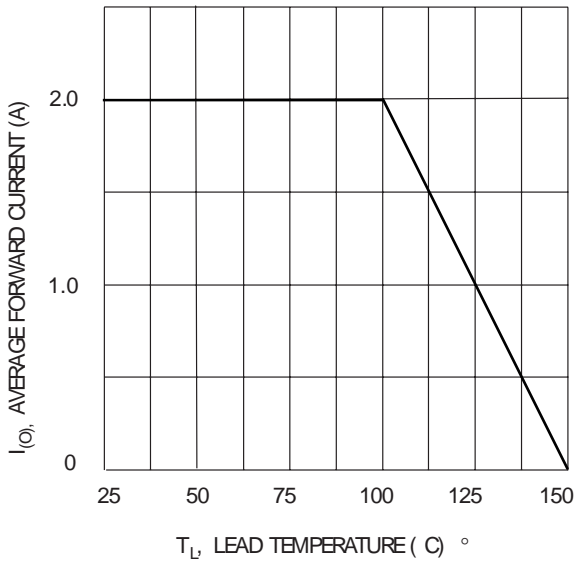


Fig. 1 Forward Current Derating Curve

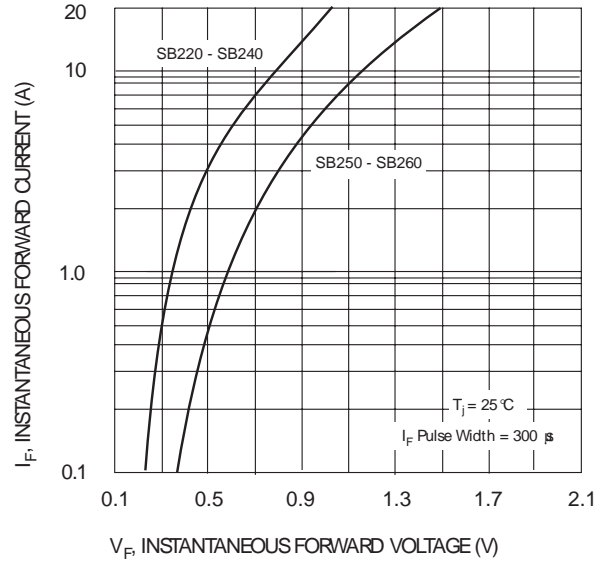


Fig. 2 Typical Forward Characteristics

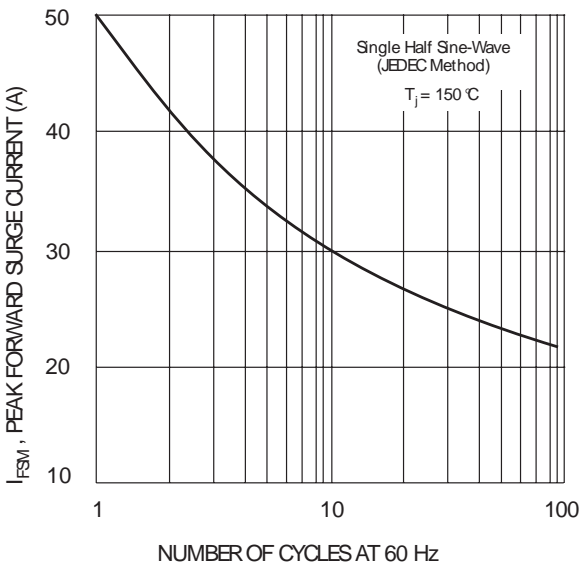


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

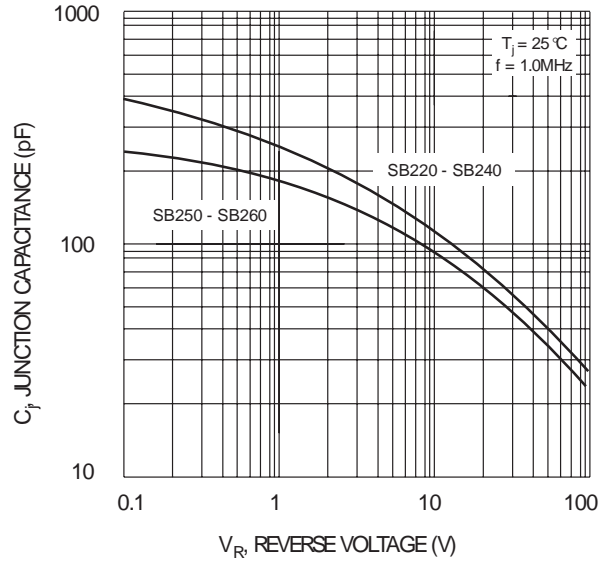


Fig. 4 Typical Junction Capacitance

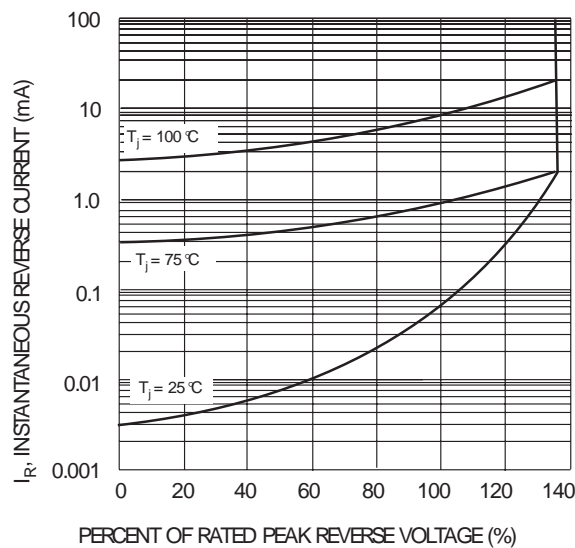


Fig. 5 Typical Reverse Characteristics

ORDERING INFORMATION

Product No.✎	Package Type	Shipping Quantity
SB220-T3	DO-15	4000/Tape & Reel
SB220-TB	DO-15	3000/Tape & Box
SB220	DO-15	1000 Units/Box
SB230-T3	DO-15	4000/Tape & Reel
SB230-TB	DO-15	3000/Tape & Box
SB230	DO-15	1000 Units/Box
SB240-T3	DO-15	4000/Tape & Reel
SB240-TB	DO-15	3000/Tape & Box
SB240	DO-15	1000 Units/Box
SB250-T3	DO-15	4000/Tape & Reel
SB250-TB	DO-15	3000/Tape & Box
SB250	DO-15	1000 Units/Box
SB260-T3	DO-15	4000/Tape & Reel
SB260-TB	DO-15	3000/Tape & Box
SB260	DO-15	1000 Units/Box

Products listed in **bold** are WTE **Preferred** devices.

✎T3 suffix refers to a 13" reel. TB suffix refers to Ammo Pack.

Shipping quantity given is for minimum packing quantity only. For minimum order quantity, please consult the Sales Department.